


Squirrel Beaver Tail / Flat Top Trailer

The Trailer is designed for the safe loading, unloading and transport of Squirrels and other goods. Rated ATM 3.5 tonne or (ATM 4.4 tonne) with a max load 2.3 tonne or (3.2 tonne), available in three size


- Trailer can be registered with ATM of 3.5 tonne with 50mm ball hitch or ATM 4.4 tonne with 70mm ball hitch
- 8mm thick expanded floor mesh on steel floor & both sides of ramp.
- 50x25 RHS cross member every 280mm under 8mm thick expanded floor mesh tray floor, Rope rail Ø27mm on front & both sides
- Bottom prop on loading ramp.
- Ramps can fold right over to give flat top
- Different drawbar (short, medium & long) can be changed on ordering
- Head rail 0.92m high from tray, can be removed if not required
- Gap in head rail for Squirrel boom recess
- Axles Ø65mm, hubs, springs, electric brakes, wheels all rated to 4 tonne
- Electric breakaway brakes with auto charging battery back up.
- Landcruiser PCD on 15" rims
- Safety - Squirrel cage access platform, hand rail & steps bolted on, can be removed later.
- Supplied with 1 new spare wheel
- Gas struts & springs on rear ramps so lifting is no more than 8 kg
- Hand grip for easy lifting of ramps
- Foot step rail on both sides of tray
- Aluminium tool box with gas struts on lid
- LED lights with round 7 pin plug
- All frame is hot dip galvanised
- High quality trailer jockey wheel with wind up stand, load rated to 400 kg
- Platform and steps with hand rail makes it safe to get in & out of the cage.



358, 508, 558 & 536 Squirrel on a Trailer flat top with a short drawbar.

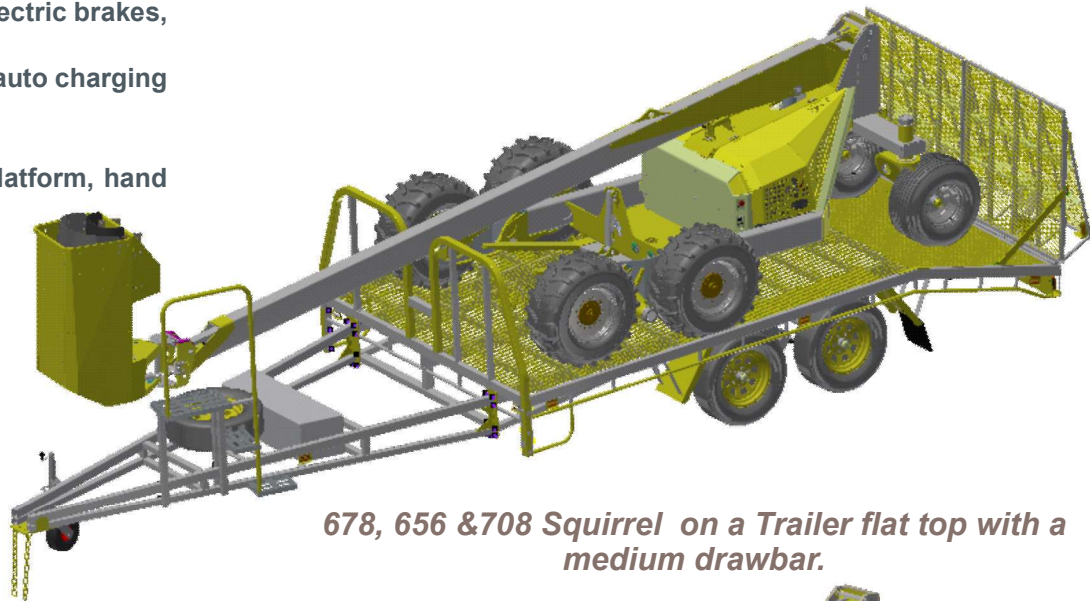

678, 656 & 708 Squirrel on a Trailer flat top with a medium drawbar.

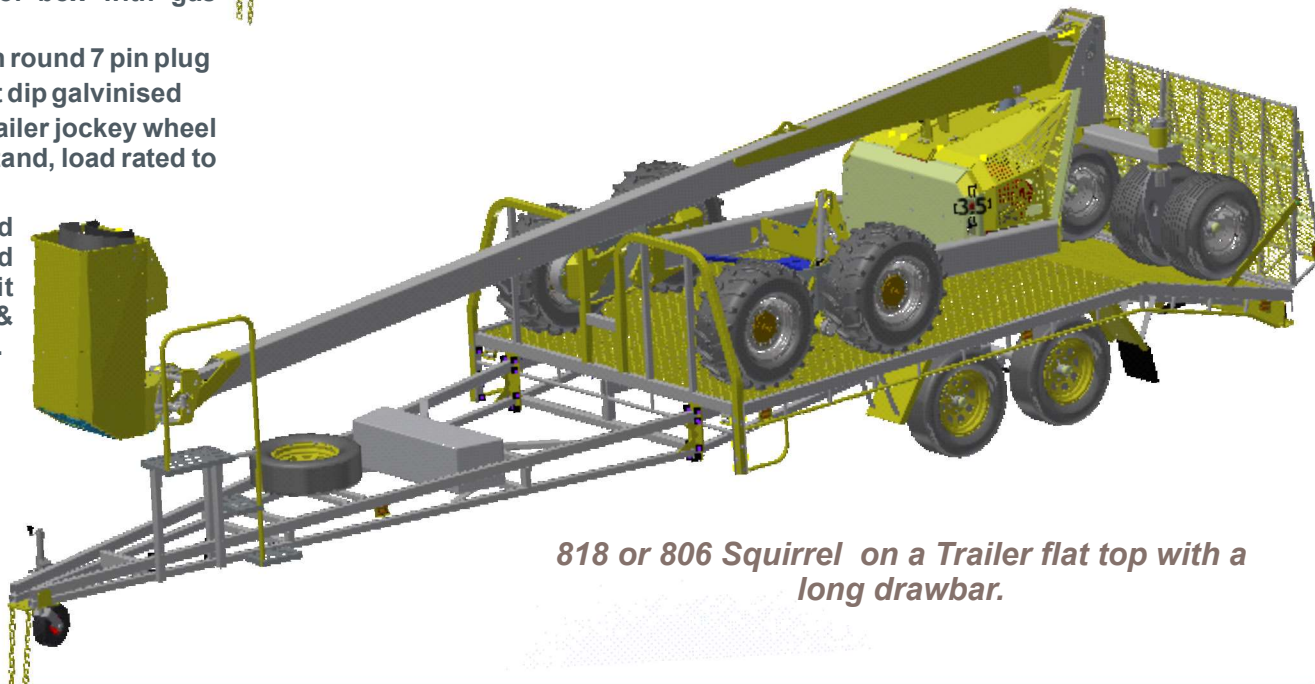

818 or 806 Squirrel on a Trailer flat top with a long drawbar.

Manufacturers and designers of horticultural equipment

phone : 1300 761 922
Email; info@crendon.com.au
www.crendon.com.au



Available Through Your Local Dealer

Squirrel Beaver Tail / Flat Top Trailer



*Squirrel Trailer Flat Top with a medium drawbar.
Ramps folded right over to give flat top*

Flat Top Squirrel Trailer Specifications

Trailer A.T.M	3500 kg with 50mm ball hitch or 4400 kg with 70mm ball hitch
Trailer Carrying capacity	2300 kg with 50mm ball hitch or 3200 kg with 70mm ball hitch
Tare mass	1200 - 1250 kg
Flat Top Tray space measurements	4.47m long x 2.48 wide
Tray height	0.79m
Ramp angle and length	15° / 1.2m long
Total length rear of ramp in upright position	7.1m for short drawbar 8.4m for medium drawbar 9.8m for long drawbar
Axles	2 x solid Ø65mm, Inner and outer bearing min 2 x 68149, (rated at 4.5 tonne)
Springs	8 leaf tandem rock/roll 60mm X 6.5mm (rated at 4.5 tonne).
Brakes	electric drum 12" x 2.5" with manual park brake
Tyres	225/75R15C, 10 ply, load rating 1100 kg per tyre when in tandem
Rim	Land Cruiser 15 x 6", 6 stud pattern
Wiring	LED, 12V 7 pin small metal round plug
Finish	Hot Dip galvanised & silver paint
Tool box size	1100mm(L) x 320mm(W) x 300mm(H)



Ramps folded right over to give flat top. Four tension springs make this easy to swing over or can be held upright with side locking brace supplied.



When ramps are down it is easy to drive up. Each ramp has gas strut & springs so the weight is less than 8kg each making easy and safe to swing up

Manufacturers and designers of horticultural equipment

phone : 1300 761 922
Email; info@crendon.com.au
www.crendon.com.au



Available Through Your Local Dealer

6-2024