



Crendon Nominees Pty Ltd A/T/F
the Fry Family Trust T/A: Crendon Machinery
ACN 009 135 335 ABN 53 913 250 628


2 Ramsay Tce
PO Box 95
DONNYBROOK WA 6239

Ph: (08) 9731 1502
Toll Free: 1300 761 922
Fax: (08) 9731 1657
Email: info@crendon.com.au
www.crendon.com.au

Manufacturers and Designers of Horticultural and Viticultural Equipment
* SQUIRREL self propelled elevating platforms * SADIE vineyard & orchard sweepers * NETWIZZ netting retriever

SQUIRREL Parts Catalogue # 2

Electrical, Switches PCBs, Lights & Wiring



SQUIRREL Parts Catalogue # 2

Page

<i>Electrics Switches, Start, E stop</i>	<i>2</i>
<i>Electrics Switches, Rotary Potentiometer, Pressure Switches ..</i>	<i>2</i>
<i>Limit Switches, Toggle Joystick, Toggle Switch.....</i>	<i>3</i>
<i>Proximity Switch, Buzzers, Horns,</i>	<i>4</i>
<i>Oil Pressure Switches, Cage Door Switch.</i>	<i>5</i>
<i>Lights, Beacons,</i>	<i>5</i>
<i>PCB boards,</i>	<i>6</i>
<i>Relays, Rectifiers, Battery,</i>	<i>7</i>
<i>Hour Meters, Trailer Plugs, Linear Actuator</i>	<i>8</i>
<i>Slope Sensors, Wire Harness</i>	<i>9</i>
<i>Electrics Switch Boxes,</i>	<i>10</i>
<i>Fans, Electrics Terminals</i>	<i>11</i>
<i>Electrics Terminals, Fuses, Electrics Wire single core</i>	<i>12</i>
<i>Electrics Wire Multi Core, Conduit, Heat Shrink</i>	<i>13</i>
<i>Cable Ties, Battery Terminals, P clips</i>	<i>14</i>

Electrics E Stop & Start Switches



Push button switch plastic SPST latching (1990-2005) – **ESP319.348**

Push button switch plastic SPST non-latching (1990-2015) – **ESP319.332**



Covers for above switches

Push button cover clear - **ESP319.348**

Push button cap red – **ESP319.376**

Push button cap green – **ESP319.382**



Push button start, spring return, NO, Gold Contacts, green with silicone boot, IP 67 – **ESP319.382** \$16.64 + GST (This is what we are using now) (From 2005)



E Stop, turn to release, NO, NC, Gold Contacts, red mushroom head, IP 67, - **ESP319.400** \$17.90 + GST (This is what we are using now) (Petrol engines From 2005)



E Stop, spring return, NO, NC, Gold Contacts, red mushroom head, IP 67, (Diesel engines From 2005)- **ESP319.400**

E Stop, pull to release, NO, NC, Gold Contacts, red mushroom head, IP 67, - **ESP319.670**



E Stop, Box Type 1 – **ESP319.670**

Electrics Switches



Arrow push button switch silver contact, IP65, used for Emergency decet – **ESP319.220**



Switch box white plastic – **ESP319**



Switch box E Stop & start assembly in plastic enclosure IP65– **ESP319**




Switch box E Stop & start assembly in aluminium enclosure IP66– **ESP319***



Switch box E Stop assembly in aluminium enclosure IP66– **ESP319**

Heat sensor Switches



Heat sensor switch, on Kubota Diesel engines with blower radiator fan, bolted to thermotic, 8mm hole, normally open, 85°C, used to switch on horn & auto stop engine if engine gets to hot (from mid2025) – **ESHSSKDE85C** \$29.65 + GST

Rotary Potentiometer



Throttle speed adjustment Ø22mm hole, rotary potentiometer converter LA42DWQ-22-5K (23HP EFI from mid-2018) **ETCEFIG** replace with switch below.

Rotary Potentiometer



Throttle speed adjustment Ø9mm hole, rotary potentiometer converter, IP65, ETC9M5K320/67 (23HP EFI from mid-2020) **XTCP***

Pressure sensor Switch



Oil Pressure Switch ¼" FM BSP 500 PSI – 3,000 PSI (**7) – **ESOP14FM NONC**



Oil Pressure Switch ¼" M BSP 500 PSI – 3,000 PSI (**7) –

PS600200

Oil Pressure Switch ¼" FM BSP 500 PSI – 3,000 PSI (**7) –

PS14BSPF300B

Toggle joystick



Rubber boot for both types of toggle joy-stick 30mm hole, – **ESTJRB30 (2017 - 2019)**



Toggle joystick 30mm hole, 4position, latching, 4 x NO, aluminium top & thread, (replacement for old 3 speed) – **ESJS4WL4XNO24 \$38.57 + GST**



Toggle joystick 30mm hole, 2position, spring-return, 4 x NO (replacement for old throttle) – **ESJS2WS4XNO24 \$38.57 + GST**

Limit Switch



Squirrel boom limit switch IP67, NO/NC, 12V, 15a, 1m lead - **ELS8943346**

Cage Door Switches



Cage Door switch, IP67, NC & NO, Ø12mm thread, made in Japan – **ESCDLS12 (from 2023) \$47.26 + GST**

Limit Switch



Micro Limit switch, long lever, IP67, NO/NC, 12V, 15a, made in Japan, (AZ7120) (used in boom height switch & 708 swing out wheels switch from early 2025) – **EMLSLJAZ7120 \$47.26 + GST**



Limit switch, short lever, IP67 NO/NC 12V, 15a, (SVAZ-7140) -



Limit switch, lever with roller, IP67 NO/NC 12V, 15a, (SVAZ-7121) -



Limit switch, with roller cross ways on plunger, IP67 NO/NC 12V, 15a, (SVAZ-7312)-



Limit switch, with roller in line on plunger, IP67 NO/NC 12V, 15a, (SVAZ-7311)-



Limit switch, with spring whisker, IP67 NO/NC 12V, 15a, (SVAZ-7166)-

Toggle Switch IP67 (358, 558, 678 & 818)



3 SPEED & Bin forks, Switch Waterproof Toggle Switch Model: # T501CT, Function: ON-OFF-ON latching, Amps: 15, Volts: 12, Ø 12mm, Terminals: 3 pins, IP67. - **ETS3P3P12MIP67** \$14.82 + GST



Horn & Emergency descent, Switch Waterproof Toggle Switch Model: # T501MT Function: ON-OFF-ON spring return, Amps: 15, Volts: 12, Ø 12mm, Terminals: 3 pins, IP67. - **ETS2P3PSRM12** \$14.82 + GST



Throttle Switch Waterproof Toggle Switch Model: # T502MT Function: ON-OFF-ON spring return, double pole - double contact, Amps: 15, Volts: 12, Ø 12mm, Terminals: 6 pins, IP67. - **ETS3P6P12MOMIP6** \$17.62 + GST



Waterproof Toggle Switch Boot Model: # T700-3, 12mm, switches cover waterproof
Green - 3 speed,
Yellow - Bin forks & Auxiliary Hyd
Blue - Throttle
Red - Horn & Emergency descent
 - **ETSC12M** \$5.85 + GST



Mud guard washer for toggle switch 50mm od 12mm id (used when replacing 30mm switches) - **BWMGZ1/2X2X** \$1.15 + GST

Proximity sensor Switch



Proximity switch, boom height switch & swing out wheels switch, 25mm range, 5m lead, 1amp, NO & NC, IP 67- **ESPSLM42** (used up to early 2025) \$35.45 + GST



Photo sensor switch 100-300mm range, 4m lead, 3amp, NO, (used to sense height of boom on old 655 & 805) - **ESPSIP6730**

Photo sensor switch 50-150mm range, 5m lead, 1amp, NO, (used to sense the drive wheel position on old 655 & 805) - **ESPSIP67150**



Proximity Magnetic switch 10mm range, 2m lead, 1amp, NO - **ESPS12x10**

Proximity sensor Switch



Proximity switch 50mm range, 3m lead, 3amp, NO, IP 67 - **ESPSIP6730**

Buzzers



Back up Alarm DC12-24V, IP67, 97dB (new from 2021) (Slope sensor alarm) - **ESBA10267** \$18.57 + GST

Horns



Snail car horn, TZ-112S, IP67, 12V, 105-118Db, use for Kubota heat sensor alarm (Squirrel horn from 2022) **ESCH12V105DB \$22.85 + GST**



Big Snail truck horn, TZ-112S, IP67, 12V, 130Db, (Squirrel horn from 2023) **ESCH12V130DB \$38.10 + GST**



Oil Alarm 95DB Alarm High-decibel 3-24V 12V Electronic Buzzer Continuous Beep (high quality) (key left on alarm, used on PCB board) – **ESBP95CH**

Oil Pressure Switches



Oil pressure switch, on Petrol & Diesel engines, 1/8"NPT, 0.2- 0.3 bar, normally closed, to switch on engine running accessories, painted yellow, *special made (This is what we are using from late -2015)* – **ESOP1/8NC0.2B \$27.38 + GST**



Oil pressure switch, on petrol engines, 1/8"NPT, normally open used to switch on accessory's electric circuit has screw on back (*do not use any more*) – **ESOPS18NPTNOS \$17.74 + GST**

Battery isolator



Battery isolator, 300 amp, used from 6-2024 squirrels – **ESBI300A no longer used use below**



Battery isolator, 300-amp, Tang type, used from 11-2024 squirrels – **ESBIK300A12V \$10.85 + GST**



Battery isolator, 300-amp, Ø7 holes, key rotated 90°, Tang type, Heavier plastic, replaces the above – **ESBIK300A12H \$15.55 + GST**



Battery isolator (Tang type) & circuit breaker mounting bracket– **ESBICBMB \$38.84 + GST**



Battery isolator, 500-amp, very heavy duty, with lock out plate, used from 6-2026 squirrels – **ESBIL500A12V \$..... + GST**

Electrics Circuit Braker



Circuit breaker 10A 12V/250V - **ESCB15A (This is what we are using for accessories)**

Circuit breaker 15A 12V/250V - **ESCB15ATB50V125 (This is what we are using for cooling fans)**

Electrics Circuit Braker



Circuit breaker, heavy duty, water proof, 30A 12V, used from 8-2024 TO 2025 squirrels – **ESCBK1630AW** \$41.55 + GST



Circuit breaker, heavy duty, water proof, 30A 12V, Kuoyua 16 series, TC1/0LO/C1, used from 2025 squirrels – **ESCBK30AW25** \$41.55 + GST

Electrics Switches



Push/pull switch – **EGFN62073**



Switch Push Pull 12v Red globe ACX3668BL – **EGSPP3668**

Slope Switch



Tilt switch non-mercury 15°, Comus S1267 - **EMS15-S1267** \$25.23 + GST

Electrics Lights



LED 12-24v light combo 100 x 100 square stop, tail, indicator, two off - **EGFLED100** \$37.50 +GST




Amber LED Rotating Beacon 10-30V, IP67, 24w, Diameter 130 height 110 BC1300– **EALEDB12IP67** \$45.24 +GST




Amber LED flashing strip 10-30V, IP67, 36w, 47mm 132 long x wide x 18mm height LH212– **EGSLLEDA** \$37.68 + GST


PCBA Board

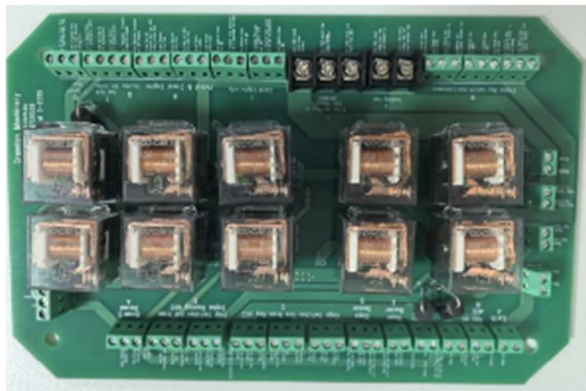

Petrol & diesel 5-2025 PCB wiring board; with plug in 40-amp HD LED relays, Diesel auto stop & horn on for over heat (2 sensors) & no oil pressure, Squirrel 3 Speed, height cut-out on 3 speed, starter relay, 40-amp load for fans & relay, 3 speed relay, bin forks relay, 10-amp diode, separate engine fans power circuit, separate engine running power circuit, separate key on power circuit, **requires std NC oil pressure switch (from 5-2025)** – **PCBA-SQP-D5-25*** \$313.83 + GST

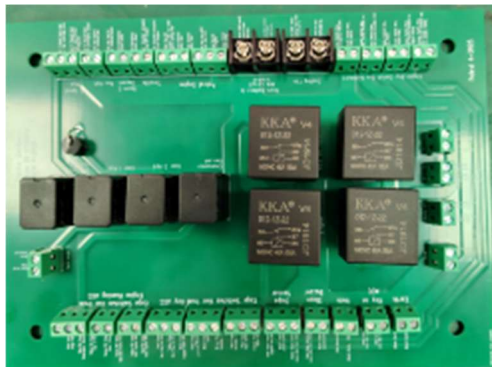

Petrol 4-2025 PCB wiring board; with plug in 40 amp auto relays, Squirrel 3 Speed, height cut-out on 3 speed, starter relay, 20-amp load for fans & relay, 3 speed relay, bin forks relay, 10-amp diode, separate engine fans power circuit, separate engine running power circuit, separate key on power circuit, **requires std NC oil pressure switch (from 5-2025)** – **PCBA-SQPET4-25** \$269.61. + GST

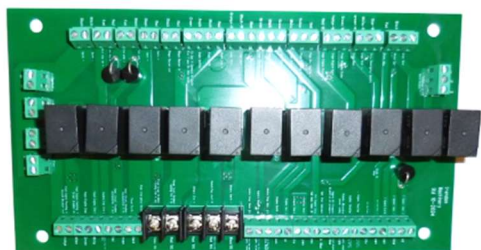


PCBA wiring board Std 10-2024; with plug in 40 amp auto mini relays, Squirrel 3 Speed, Kubota diesel stopping, diesel fuel pump, height cut-in for slope sensor, height cut-out on 3 speed, starter relay, 15-amp load for fans & relay, 3 speed relay, bin forks relay, 10-amp diode, separate engine fans power circuit, separate engine running power circuit, separate key on power circuit, **requires std NC oil pressure switch (from 9-2024) (this is a replacement for the PCB listed below)** - **PCBA-SQSTD10-24** \$235.50 + GST


PCBA Board



PCBA wiring board Std 2-2024; with plug in 40 amp auto mini relays, Squirrel 3 Speed, Kubota diesel stopping, diesel fuel pump, height cut-in for slope sensor, height cut-out on 3 speed, starter relay, 15-amp load for fans & relay, 3 speed relay, bin forks relay, 10-amp diode, separate engine fans power circuit, separate engine running power circuit, separate key on power circuit, **requires std NC oil pressure switch (from 1-2024 – 9-2024) (this is a replacement for the PCB listed below)** - **PCBA-SQSTD2-24*** \$235.50 + GST

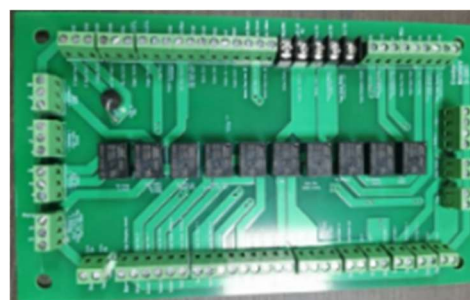

PCBA wiring board –008 series; Squirrel 3 Speed, Kubota diesel stopping, diesel fuel pump, swing-out wheels, height cut-in for slope sensor, height cut-out on 3 speeds, starter relay, 15-amp load for fans & relay, 3 speed relay, bin forks relay, 10-amp diode, separate engine fans power circuit, separate engine running power circuit, separate key on power circuit, (from 6-2023 – 12-2023) - **PCBA-SQ06-23** \$125.05 + GST

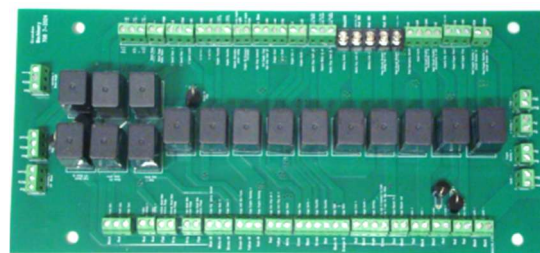

PCBA wiring board –708 series; 16 x plug in mini auto relays, Fail safe design, dead man function, Squirrel 3 Speed, Kubota diesel stopping, diesel fuel pump, swing-out wheels, height cut-in for slope sensor, height cut-out on 3 speed, starter relay, 15-amp load for fans & relay, 3 speed relay, bin forks relay, 10-amp diode, separate engine fans power circuit, separate engine running power circuit, separate key on power circuit, 315mm x 170mm (from 6-2024) - **PCBA-SQ2-24** \$332.50 + GST

PCBA Board



PCBA wiring board – 005 & 006 & 008 series; Squirrel 3 Speed: swing-out wheels, height cut-in for slope sensor, oil pressure buzzer, height cut-out on 3 speed, starter solenoid, (from mid-2015 - 2021) - **PCBA-SQ2**
 \$125.05 + GST



PCBA wiring board - 007 series; Squirrel 3 Speed: drive wheels position, height cut-in for slope sensor, height setting for slope sensor settings, oil pressure buzzer, height cut-out on 3 speed, starter solenoid, bin forks, crab steer, boom sequence, (from late 2015) - **PCBA-SQ007**



PCBA wiring board – 008 series; Squirrel 3 Speed: height cut-in for slope sensor, height cut-out on 3 speed, starter solenoid, 2 x live circuits, plug in diode, bridge rectifier. (from 2021) - **PCBA-SQ21**

Electrics relays



Relay double reversing contact 12V 50/30A, with socket & 150mm lead - **ESRR12V40B5P**



Relay base with 150mm lead – **ESRRB5L**



Relay base 4&5 pin left picture - **ESRBRB1**
 Relay base 4&5 pin & mounting bracket right picture - **ESRBRB2**



Relay double reversing contact 12V 50/30A - **ESRR12V4030A**



Relay 5 pin. double reversing contact 12V 40A, very HD, clear body, LED light when operating (from 5-2025) - **ESRR12V100A** \$4.26 + GST



Safety Relay double throw, double contact, 8 pin, 12V 5A for 2-2024 PCB – **ESR8pin12V5A**




Mini Auto Relay, double contact, 5 pin, 12V 40A for 2-2024 PCB – **ESMR5pin12V40A**

Rectifiers



Bridge rectifier 25A 1000V - **ESBR25A100V**

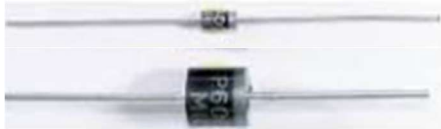

Rectifier diode IN4004 1A 400V - **ESDIN4004**
 Rectifier diode IN4004 5A 400V - **ESD5A1N5825** \$4.06 + GST
 Rectifier diode IN4004 20A 45V - **ESD20A45VR**



Plug in Rectifier diode- **ESDBM12VB**

Battery



Battery calcium MF, NS40ZLS-SMF, 420CCA, 125mm deep x 195mm wide x 200mm high (for all except 008 models)- **BA43** \$102.95 + GST



Battery 550 CCA, big terminals, 170mm deep x 230mm wide x 210mm high (for diesel 008 models)- **BASC550** \$148.88 + GST

Electrics Hour Meter



Hour Meter/Tacho HM02 red CH - **HMLHM006** \$24.59 + GST
 Hour meter - vibration activated CH (diesel engine)- **HMVBR**

Electrics Hour Meter



Hour meter quartz, plastic housing, IP68, Ø 50mm hole 5/36V, AC & DC (new from 2021) - **HMIP67RLM** \$31.59 + GST



Hour meter quartz, plastic housing, IP67, rectangle hole 5/36V, AC & DC (new from 2021) - **HMIP67-TH1** \$38.54 + GST



Hour meter quartz, plastic housing, IP67, rectangle hole 5/36V, DC (new from mid-2023) - **HMIP67-SYS-1**



Hour meter LCD, plastic housing, 25year life, IP67, rectangle hole 5/36V, DC (new from mid-2024) - **HMIP67RL010A** \$42.15 + GST
(This is what we are using in-2024)



Hour meter LCD, maintenance minder, programable can pre load hours on it, can see number when engine is off, 20year life, IP67, Ø51 hole 5/36V, DC (new from early-2025) - **HMIP67RL069A** \$67.52 + GST
(This is what we are using in-2025)



Hour meter bracket for above 2 types flat or raised - **HMMB50***

Trailer Plug



Trailer Plug 7 pin Metal – TPM7P



Trailer socket 7 pin Metal – TPM7PS

Liner Actuator



Linear actuator heavy duty 700N; 40mm stroke; 12V black lead 1m, IP66, has slot in foot mount (Electric throttle from mid-2026) – LA100IP66SYAO4B \$..... + GST



Linear actuator heavy duty 700N; 40mm stroke; 12V black lead with deutsch plug x 2.5m, IP66, heavy duty wiring & limit switches, (Electric throttle from mid-2026) – LA100IP66SYAO4B \$133.78 + GST



Linear actuator heavy duty 700N; 40mm stroke; 12V black lead with deutsch plug x 2.5m, IP66 (Electric throttle from mid-2021) – LA100IP66-LAJ \$111.82 + GST
(This is what we are using now)




Linear actuator medium duty 200N; 40mm stroke; 2.5m lead, IP66 (Electric throttle from 2019-2021) – LAUL1IP652.5 \$72.83 + GST



Linear actuator light duty 200N; 40mm stroke; 2.5m lead, IP65 (Electric throttle before 2019) – LA40N40S12V \$54.91 + GST

Electrics Slope Sensors

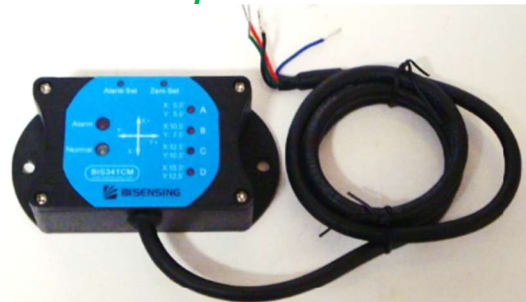

Tilt switch X & Y, 2 axis, 4 fixed alarm settings 5° & 5°, 7.5° & 10°, 12.5° & 10°, 12.5° & 15°, 2 sec delay, easy 0° set, (0.8m lead), fail safe, beeps on start up after 5 sec for 1 sec, 2 amp, programable if required, full EWP safety compliant – EMSBIS341CM *(This is what we are using in from mid 2025)*

\$322. + GST



Tilt switch 2 axis, 4 fixed alarm 7.5° & 10°, 12.5° & 10°, 12.5° & 15°, 15° & 17.5°, 2 sec delay 0° set (0.6m lead), 3 amp - EMSMCA32D-NV *(up to 2-2025)*

\$272.55 + GST



Tilt switch 1 axis, 2 fixed alarm 30° & 50°, 2 sec delay, 0° set (3m lead), 3amp - EMSMCA31D-NV

Wire Harnesses



Engine Petrol wiring harness 8 pin IP67, light wires, 2m + 0.7m EWH6PM/F



Engine Petrol wiring harness 8 pin IP67, heavy wires, 2m + 0.7m EWH8PM/F


Deutsch Plug




Deutsch plug 2 pin Male with 150mm of wire **ETDP2PM+L**



Deutsch plug 2 pin Female kit **ETDP2PF**

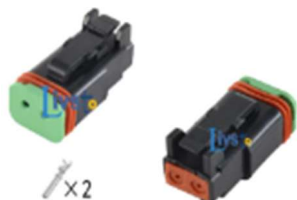

Deutsch plug 2 pin Male kit **ETDP2PM**

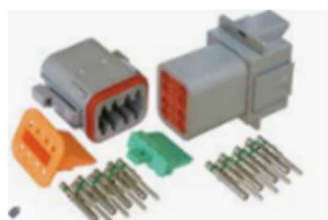

Deutsch plug 8 pin kit – **ETDP8P**



Deutsch plug 8 pin male set – **ETDP8M22-16A**



Deutsch plug pin female each – **ETDP1F3MM**



Deutsch plug pin male each – **ETDP1M3MM**

Electrics Switches Boxes



Electrical Box in engine bay, IP66, ABS 280 x 190 x 130 deep - **AEB280190130** \$48.54 + GST



Electrical Box waterproof ABS 280 x 190 x 180 deep - **AEB280190180** \$81.04 + GST



Aluminium electrical box big, for engine bay 340 x 235 x 160 deep – **AEB340235160** \$168.96 + GST (for all engines, from 6-2024)

Aluminium electrical box big, for engine bay 265 x 185 x 120 deep – **AEB265185120** \$178.42 + GST (for 358, from 11-2024)



Aluminium electrical box 188 x 120 x 78 deep (007 Cage switch box) - **AEBSPAGFA3** \$33.94 + GST



Aluminium electrical box in cage, IP67, 222 x 145 x 55 deep- **AEBSPAGFA5** \$47.19 + GST (008 *This is what we are using now*)

Alum electrical box, IP67, 222 x 145 x 75 deep – **AEBSPAGFA6** \$61.09 + GST

Electrics Switches Boxes



Plastic screw for Elect. Box ABS 280x190x130 – **AEBPS16X50** \$4.23 + GST



SS screw for Alum elect box -
4mm x 16mm long **BSCMPM4x16**
4mm x 30mm long **BSCMPM4x36**



Plastic Electrical Box, IP66, 195 x 145 x 75 deep for LVI cages – **AEB195x145x75** \$32.20 + GST (LVI 008 *This is what we are using now*)

Exhaust Fans



Exhaust Fan to keep engine bay cool on 008 Squirrels, 12V, (8") fan – **EF0812K** \$.....
(9") fan – **EF0912K**



Sucking cold air into the engine bay, engine side, to keep engine bay cool on 008 Squirrels, fitted on the left-hand bonnet, IP67, 12V, 4.5 amp, IP67 plug, fan held on with 4 screws, 5,000-hour life, has arrow holes in plastic fan hub
10" Sucking fan # KLNf174F – **EF10S12V4.5A** \$87.60 +GST
9" Sucking fan # KLNf173F – **EF09S12V4.5A** \$85.41 +GST



Blowing hot air out of the engine bay, fuel tank side, to keep engine bay cool on 008 Squirrels, fitted on the right-hand bonnet, IP67, 12V, 4.5 amp, IP67 plug, fan held on with 4 screws, 5,000-hour life, has no holes in plastic fan hub
10" blowing fan # KLNf174 – **EF10B12V4.5A** \$96.35 +GST
9" blowing fan # KLNf173 – **EF09B12V4.5A** \$85.41 +GST

Exhaust Fans 2 wire connector



Exhaust Fan 2 wire connector Male for 4mm wire **EFDJ7026-2.8M** \$.....

Exhaust Fans 2 wire connector



Exhaust Fan 2 wire connector Male & Female for 4mm wire **EFDJ7026-2.8MFM** \$.....

Electrics Terminals



Electric Cable joiner 2.5-3mm red - **ETN56154**
 Electric cable joiner 4mm blue - **ETN56156**
 Electric cable joiner 5-6mm yellow - **ETN56158**



Electric Cable heat shrink joiner 2.5-3mm red – **ACX3064**
 Electric cable heat shrink joiner 4mm blue – **ACX3065**
 Electric cable heat shrink joiner 5-6mm yellow – **ACK3066**



Electric Term 6.3mm red - **ETN56142**
 Electric Term 6.3mm blue - **ETN56144**
 Electric t Term 6.3mm yellow - **ETN56145**



Electric Term 2.8mm (F) blade red – **ETN56033BL**
 Wiretap connector 3-4mm – **ETN56060**



Blade term (M) 6.3mm red – **ACX3006**
 Blade term (M) 6.3mm Blue – **ETN56022**
 Blade term (M) 6.3mm Yellow – **ETN56024**



Crimp term (m) bullet 4mm blue – **ETN56148**



Open spade term 3mm red – **ETACX3043**
 Open spade term 4mm blue – **ETACX3045**
 Open spade term 5mm yellow – **ETACX3047**



Ring term 3mm wire red - **ETN56172**
 Ring term 4mm wire blue – **ETN56180**
 Ring term 8.4mm wire yellow – **ETN56090**



Prong term 3mm wire red – **ETN56212**



Wiretap connector 3-4mm – **ETN56060**

Electrics Terminals



Cable Lug for battery cables 8mm hole – **BACL25-8**
 Cable Lug for battery cables 10mm hole – **BACL25-10**

Battery Terminals



Battery terminal, heavy duty (brass) Negative – black - **BTBNTB**
 Battery terminal, heavy duty (brass) Positive – Red – **BTBPTR**

P Clips



Large 12.7mm steel with PVC coated – **ACX1310**
 Medium 10mm steel with PVC coated – **ACX1308**
 Large 12.7mm Nylon – **ACX1303BK**
 Medium 10mm Nylon – **ACX1302BK**
 Small 4.6mm Nylon – **ACX1300BK**

Electrics Circuit Fuses



Fuse holder suit 5mm blade fuse – **EGFHBFS3**



Fuse Blade 2AMP Grey – **EGFB2A**
 Fuse Blade 5AMP Yellow – **EGFB5A**
 Fuse Blade Mini 10AMP red - **EGFB10AM**
 Fuse BLADE 15 AMP - **EGFB15A**
 Fuse blade 25 Amp white - **EGFB25A**
 Fuse blade 30 Amp – **EGFB30A**



Fuse blade 25 Amp auto reset white - **EGFBAR25A**



Fuse blade 30 Amp auto reset green – **EGFBAR30A**

Electrics Wire Single Core



Auto cable 1 core 3mm 10A black – **EWC1C3M100BK** or **EW1C1MCH**

Auto cable 1 core 3mm 10A red – **EWC1C3M100RD**

Auto cable 1 core 3mm 10A Yellow – **EWC1C3M100YE**

Auto cable 1 core 3mm 10A Green – **EWC1C3M100GR**

Auto cable 1 core 3mm 10A white – **EWC1C3M30W**

Auto cable 1 core 3mm 10A Orange – **EWC1C3M30OR**

Auto cable 1 core 3mm 10A Brown – **EWC1C3M30BR**

Auto cable 1 core 3mm 10A Blue – **EWC1C3M30BL**

Auto cable 1 core 3mm 10A Pink – **EWC1C3M30PK**

Auto cable 1 core 4mm 15A Yellow – **EWC1C4M30YE**

Auto cable 1 core 4mm 15A Red – **EWC1C4M30RD**

Auto cable 1 core 4mm 15A Black – **EWC1C4M30BK**

Auto cable 1 core 5mm 20A Yellow – **EWC1C4M30YE**

Auto cable 1 core 5mm 20A Red – **EWC1C4M30RD**

Auto cable 1 core 5mm 20A Black – **EWC1C4M30BK**



Cable name	Area in mm ²	Diameter in mm	Looks like
8 B&S	7.71	5.5	
6 B&S	13.5	7.2	

Battery cable small 8 B&S black - **EWBC8BSB**

Battery cable small 8 B&S red - **EWBC8BSR**

Battery cable medium 6 B&S (13.5mm²) black (Petrol & diesel engines) – **EWBC6BSB**

Battery cable medium 6 B&S Red (13.5mm²) (Petrol & diesel engines) – **EWBC6BSR**

Electrics Wire Multi Wire



Cable 2core, 3mm² (light) Sheathed Red & Black, black outer cover – **EWC3M2C**

Cable 2core, 4mm² (medium) Sheathed Red & Black, black outer cover – **EWC4M2C**

Cable 2core, 5mm² (heavy) Sheathed Red & Black, black outer cover – **EWC5M2C**



Cable 3core, 3mm² Sheathed Red & Black– **EW3C1MCH**

Electrics Wire Battery cable



Auto cable 5 Core 2.5/3mm², Black outer cover – **EWCAM1-109-100** or **EW5C1MCH**



Auto Cable 7 Core 3mm², Black outer cover - **EWCAB7CHVY** or **EW5C1MCH**



Auto Cable 15 Core 3mm, Black outer cover – **EW15C1MCH**

Auto Cable 16 Core 3mm, Black outer cover – **EW16C1MCH**



Convoluted tubing

Very Small 7 id X 10.4od – **ECT7**

Small 9.9 id X 13od - **ECT9.9X13**

Medium 16.6 id X 21.2 od - **ECT16.6X21.2**

Large 21.2 id x 25.3 od - **ECT21.2**



Terminal Strips

Small 4mm cable x 12 - **ETACX2710**

Medium 5mm cable x 12 - **ETACX2711**

Large 6mm cable x 12 - **ETACX2712**



Heat Shrink Tube 3 x shrink rate with glue.

Heat Shrink Tube red Ø12.7 – **HST12R**

Heat Shrink Tube red Ø20 - **HST20R**

Heat Shrink Tube black Ø20 - **HST20B**

Heat Shrink Tube black Ø40 – **HST40B**

Heat Shrink Tube black Ø70 – **HST70B**

Cable Ties



Cable Ties

Small 100 x 2.5mm – **ECT102B**

Medium 200 x 3.2mm – **ECT200N**

Long 368 x 4.8mm – **ECT370X7.6B**

Very long 515 x 9mm - **ECT550**